

IM R 42 / 13 T

TELESCOPIC SPIDER LIFT

Compact and lightweight, the IM R 42 / 13 T delivers a 42' working height and up to 22' 4" of side outreach while maintaining excellent jobsite accessibility. Automatic leveling outriggers, 360° turret rotation and a 507 lb platform capacity make it a versatile choice for confined work areas.

42'

WORKING HEIGHT

22' 4"


MAX SIDE OUTREACH
@ 198 LBS.

507 lbs.

MAX WEIGHT CAPACITY



AUTO-LEVELING
OUTRIGGERS



ADJUSTABLE TRACK
WIDTH




WIRELESS GROUND
CONTROL



STOWED WIDTH



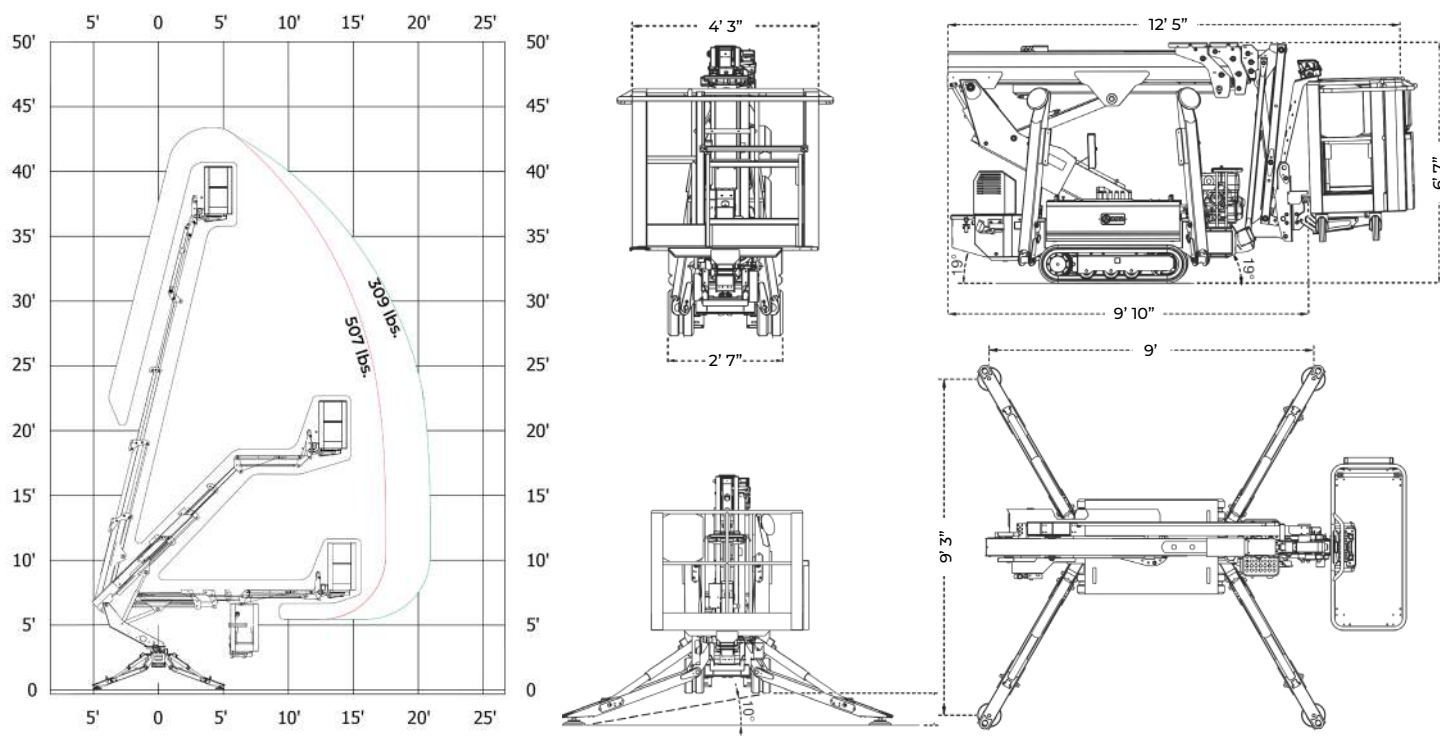

SPECIFICATIONS

SPECIFICATION	GAS
REACH & CAPACITY	
Working height	42'
Platform height	36'
Max side outreach	22' 4" / 198 lbs.
Side outreach @ 507 lbs.	18' 1"
Side outreach @ 309 lbs.	20' 8"
Side outreach @ 198 lbs.	22' 4"
Max load capacity	507 lbs.
Turret rotation	360° (not continuous)
DIMENSIONS & TRANSPORT	
Basket dimensions	4' 3" x 2' 6" x 3' 7"
Outrigger footprint	8' 10" x 9' 2"
Stowed length (without basket)	12' 6" (9' 10")
Stowed width (without basket)	4' 3" (2' 7")
Stowed height	6'
Total machine weight	3,430 lbs.
DRIVE & POWER	
Driving speed	0.9 mph
Gradeability	30%
Electric motor	120 V 1.5 hp
Gas engine	Honda GX390 - 13hp